


DOC. NO.	REVISION	ISSUE	DATE
QF/RD/05	01	00	18-09-2019



ENERGY ABSORBING WEBBING LANYARD Ref. No. PN 329(30)

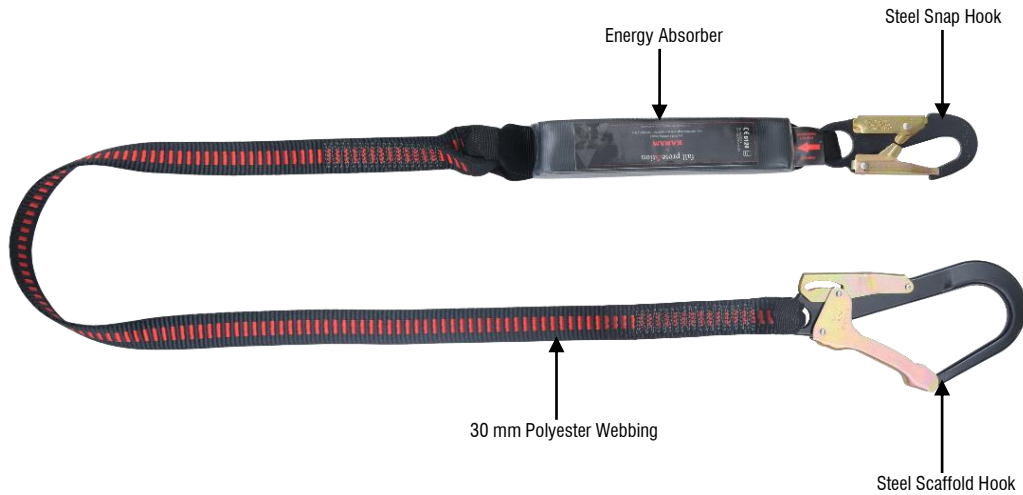

TESTED AS PER EN 355:2002



DESIGN

Webbing lanyard incorporated with Energy absorber

One side of the lanyard equipped with Steel Scaffold Hook and other side having Steel Snap Hook

WEIGHT

1.75 mts. : 1010 gm \pm 10 gm

LANYARD WEBBING

Material : Polyester

Width : 30 \pm 1 mm

Minimum Breaking Strength : 25 kN

STITCHING THREAD

Material : High Tenacity Polyester

METAL COMPONENTS

Material : Alloy Steel

Finish : Black body & gate, Lock yellow

Minimum Breaking Strength : 25 kN

VITAL TEST COMPLIANCE

Static Strength : 15 kN for 3 Minutes

Dynamic Performance : Maximum breaking force does not exceed 6 kN in the line when tested on a free fall from 4 meters height attached to a test mass of 100 kg